
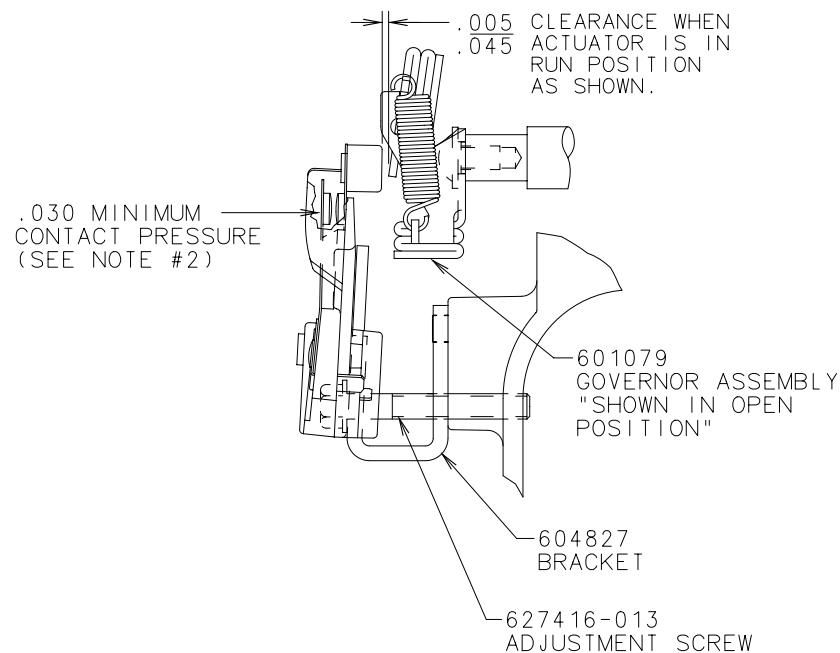


604825

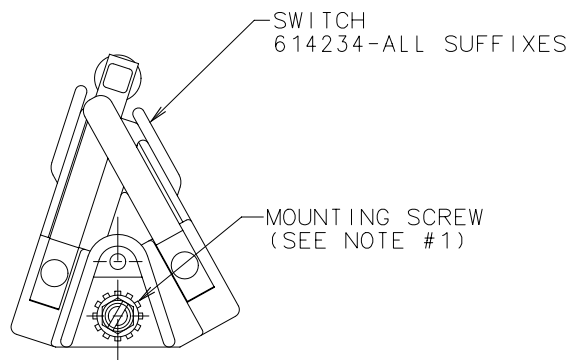

NOTES:

- (1) GRADUALLY TIGHTEN THE MOUNTING SCREW TO OBTAIN THE SPECIFIED CLEARANCE AND CONTACT PRESSURE.
- (2) CONTACT PRESSURE REQUIRES THE TOP SWITCH BLADE TO HAVE .030 MINIMUM MOVEMENT AT THE CONTACT LOCATION WHEN THE GOVERNOR IS MOVED FROM RUN TO START POSITION. MEASURE WITH FLUSH PIN GAGE.

DATE	CHANGED FROM	APPROVED ENG/DRF	NOTICE	DATE	CHANGED FROM	APPROVED ENG/DRF	NOTICE	GEOMETRIC CHARACTERISTICS & SYMBOLS	UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCES ARE AS FOLLOWS	MATERIAL	DRAWN McGUIRE 06/08/94	A.O. SMITH A DIVISION OF A.O. SMITH ELECTRICAL PRODUCTS CORPORATION TIPP CITY, OHIO COPYRIGHT 1995		
				03/01/04	UPDATED FORMAT; CHGD ADJUSTMENT SCREW	WJW/JLC	0440880	□ FLATNESS — STRAIGHTNESS < ANGULARITY ⊥ PERPENDICULARITY (SQUARENESS) // PARALLELISM ○ ROUNDNESS (CIRCULARITY) ⌀ CYLINDRICITY ⌒ PROFILE OF ANY SURFACE ⌒ PROFILE OF ANY LINE ⌒ RUNOUT ⊕ TRUE POSITION ⊙ CONCENTRICITY = SYMMETRY	INCHES .X .XX .XXX ±.02 ±.005 METRIC ±.5 ±.13 ANGLES ±.50 DEG REMOVE BURRS AND BREAK SHARP EDGES .003-.015; CORNER FILLETS TO .020 MACHINE SURFACES 125 ✓	-	APPROVED -	DESCRIPTION SWITCH ADJUSTMENT DRAWING (1 SPEED)		
										PROCESS	REFERENCE X6541 602198	SIZE B	PART NUMBER 604825	
									CONFIDENTIAL: THIS DRAWING AND ITS INFORMATION ARE THE EXCLUSIVE AND CONFIDENTIAL PROPERTY OF A.O. SMITH CORP. AND ARE NOT TO BE DISCLOSED, DUPLICATED, DISTRIBUTED OR OTHERWISE USED WITHOUT THE WRITTEN CONSENT OF A.O. SMITH CORP. - ALL RIGHTS RESERVED		APPLICATION: 56 FRAME	SCALE: FULL	NOTICE 6852	SHEET 1